


Barra de 4 m

Ø exterior en mm	Grueso pared mm	Modelo	Código	€/m
6,35	0,80	TB-1/4"	203008	4,42
9,52	0,80	TB-3/8"	203010	5,88
12,70	0,80	TB-1/2"	203012	7,88
15,87	0,80	TB-5/8"	203014	10,1
19,06	1,00	TB-3/4"	203016	14,1
22,23	1,00	TB-7/8"	203018	16,8
25,40	1,00	TB-1"	203020	19,2
28,57	1,00	TB-1-1/8"	203022	21,5
34,92	1,25	TB-1-3/8"	203024	33,7
41,27	1,25	TB-1-5/8"	203026	40,3
53,97	1,25	TB-2-1/8"	203028	52,7
66,67	1,65	TB-2-5/8"	203030	85,00
79,37	1,65	TB-3-1/8"	203032	103,00
92,08	1,65	TB-3-5/8"	203040	137,00
104,78	2,79	TB-4-1/8"	203045	258,00

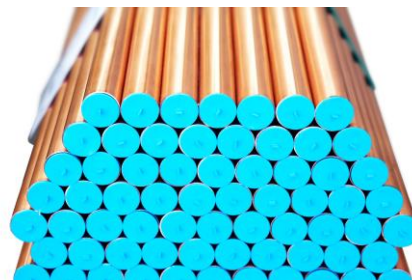

Cumple norma EN 12735-1

Suministro en barra de 4 m excepto 4 1/8" en barra de 5 m

Barra de 5 m reforzada para CO2 subcrítico

Ø exterior en mm	Grueso pared mm	Presión máx, trabajo (bar)	Modelo	Código	€/m
15,87	1,00	64	TB-5/8"-L	203107	13,1
22,23	1,14	50	TB-7/8"-L	203110	20,5
28,57	1,25	42	TB-1-1/8"-L	203114	29,4
34,92	1,65	46	TB-1-3/8"-L	203116	47,7
41,27	1,65	39	TB-1-5/8"-L	203120	58,1
53,97	2,50	45	TB-2-1/8"-L	203122	116,00
66,67	3,06	45	TB-2-5/8"-L	203124	178,00



Cumple norma EN 12735-1

Barra de 5 m reforzada para CO2 transcrito, Tipo K65

Ø exterior en mm	Grueso pared mm	Presión máx, trabajo (bar)	Modelo	Código	€/m
9,52	0,65	120	3/8"-120B	203155	10,1
12,70	0,85	120	1/2"-120B	203156	17,8
15,87	1,05	120	5/8"-120B	203157	26,4
19,06	1,30	120	3/4"-120B	203158	39,2
22,23	1,50	120	7/8"-120B	203159	53,3
28,57	1,90	120	1-1/8"-120B	203161	85,6
34,92	2,30	120	1 3/8" -120B	203162	140,00
41,27	2,70	120	1 5/8" - 120B	203163	181,00
53,97	3,55	120	2 1/8" - 120B	203164	337,00



Cumple norma EN 12735-1